

## READERS | D8339 125KHz Wiegand ISO Proximity Card (26-bit)

### Overview

The D8339 ISO proximity card is compatible with D8301, D8302, D8303 and D8304, Readykey K3000-series and GS3 Proximity Readers. 'Credit card' thin, ISO 7813 compliant with a nominal thickness of 0.03 in. it requires no batteries and carries a lifetime warranty. The card is supplied with its 26-bit Wiegand code on a removable label.

The ISO proximity card is 'credit card' thin, ISO 7813 compliant with a nominal thickness of 0.03 in., it requires no batteries and carries a lifetime warranty. The card may also be ordered with an optional 26-bit Wiegand code sticker (D8339) or with a magnetic stripe (K3011M).

Manufactured from white flexible polyvinyl chloride (PVC), the card is both strong and durable enabling digital photos and graphics to be printed directly over the front and back surfaces using an ID card printer, or via an adhesive PVC overlay with most direct image printers. Easily carried in a wallet or purse, the ISO card can also be worn on clothing with a clip or neck chain through the use of a specially designed optional card holder.

Robust, world-class construction combined with advanced technology and a pre-programmed unique identification number without site codes, makes programming easy and secure. Typical used with Radionics/Bosch™ D9000G and D7000G Control Panels, this ISO card enables a user's movements to be monitored and the building protected. The card need only be held near a D-Series or GS3 proximity door reader for the code to be read and access granted or denied. In the event that the card is lost or stolen, it can easily be replaced and the lost cards access privileges, simply and instantly revoked.

### Key Features

- Uniquely coded proximity cards
- Helps provide a secure working environment
- Simple to use
- Durable and robust
- Meets ISO standards for thickness; use with all direct image or thermal transfer printers.
- Compatible with all Stanley PAC GS3/KeyPAC series readers
- Available with optional magnetic stripe (K3011M)
- Available with wiegand code printed on adhesive label, attached to card
- Supplied with paper punch template in each pack
- No batteries design enables an infinite number of reads
- Can be easily deleted from the access control system (without the physical presence of the ID card)
- Lifetime warranty




## FEATURES AND SPECIFICATIONS CHART

	D8339-10 Wiegand ISO Proximity Card (26-bit)
Description	Uniquely coded, 125KHz, ISO proximity card
ID Technology	Stanley (KeyPAC 125KHz)
Dimensions	H: 2.12 in. L: 3.38 in D: 0.03 in.
Weight	0.20 oz. nominal
Operating Temperature	14° to 131°F
Card Construction	Thin, flexible polyvinyl chloride (PVC) laminate
Optional Slot Punch	Vertical (Paper Guide Template Included)
Finish Front	White glossy
Finish Rear	White glossy
Warranty	Limited Lifetime warranty against defects in materials and workmanship .
Ordering Information Stanley PAC Part Number (Supplied in pack of 10)	7S-D8339 - ISO Proximity card (26-Bit), labelled with wiegand code



## CREDENTIAL READ RANGE

	D8338 Key Fob	D8339 ISO Card
Standard Reader	Up to 4.7 in.	Up to 7 in.

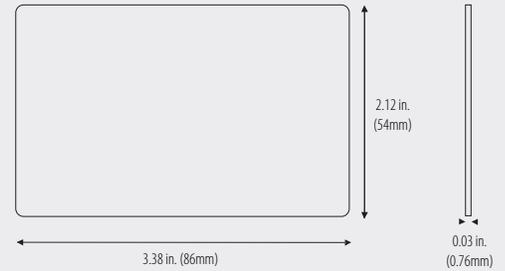

## KEYPAC CREDENTIALS



7S-D8338



7S-D8339

