

STANLEY PAC[®]

READERS | Stanley GS3-LF Vandal Proximity Reader

The Stanley GS3 Standard proximity reader offers unsurpassed quality and reliability, together with guaranteed quick and dependable read times keep traffic moving through secure areas.

Meeting the tough environmental demands of public environment applications that may need to withstand resistance to inclement weather conditions, accidental damage and physical attack, this reader offers outstanding reliability in an easy-to-install cast metal case making it ideal for vandal-prone installations in elevators, schools, campuses, car park reader posts and other unsupervised public places - both indoors and out.

In operation, the reader has two LEDs (light emitting diodes) that emits red or green lights, with the red remaining lit when the reader is active. When it senses the presentation of a valid key or card the red LED extinguishes and the green lights to indicate that access has been granted-

The Vandal Reader features simultaneous compatibility with multi-vendor credential technologies, in addition to reading 125KHz KeyPAC/153KHz PAC/Readykey™ credentials and most HID® 125 kHz Proximity, HID Corporate 1000® Proximity, — all in one reader!


Key Features

- Flexible, operates with most access controllers and burg panels that utilize a Wiegand protocol interface
- Over 3 inch reading range
- Sealed in a rugged Stainless Steel to withstand harsh environments
- Easy installation with low cost 22AWG Unshielded 4-conductor cable when connected to the Stanley PAC512 Door Controllers or 22-5 Shielded for Wiegand controllers
- Reads KeyPAC and PAC/Readykey™ and most HID® 125 kHz Proximity and HID® Corporate 1000® Proximity credentials
- Fast and dependable read times
- Supplied with durable Tamper Resistant Screws
- ADA compliant audiovisual indication making secure areas equally accessible to disabled users
- Wall tamper compliant to UL 294 and ULC S319 offering a true Class 3 reader option for access systems
- Suitable for indoor and outdoor use.
- Lifetime guarantee



FEATURES AND SPECIFICATIONS CHART

GS3-LF Vandal Proximity Reader	
Description	Mullion-style proximity reader
ID Technology	125 kHz - HID® Proximity and KeyPAC. 153 kHz - PAC and Readykey™
Programmable Output	PAC (Readykey™), PAC64, Weigand and Magstripe
Dimensions	H: 4 in. x W: 4 in. x D: 0.6 in
Weight	14.5 oz nominal
Maximum Read Range	Up to 4 in.
Environment	IP67 - Indoor / Outdoor weather resistant
Max. Current Requirements	< 90mA
Operating Voltage	12 VDC - 24 VDC Nominal (Range 10.5 to 28 VDC)
Recommended Cable Type	PAC Format: 22AWG 4-Conductor Unshielded, up to 800 ft Wiegand Format 22AWG 5-Conductor Shielded, up to 500 feet
Operating Temperature	-40° to + 151° F
Operating Humidity	10 to 85% relative humidity non-condensing (ULC S319 testing to 93%)
Audiovisual Indication	Dual LED (red-green) and audible sounder
Material	Stainless Steel
Tamper	Yes -wire tamper (PAC 512), case and wall
Certifications	UL 294 5th Ed. Attack Class 3, ULC S319-05 Class 3, UL 1610, ULC S304, UL 1076, ULC 1076, FCC Part 15 & IC RSS210
Ordering Information	7S-20116 - OneproX GS3-LF Vandal Proximity Reader

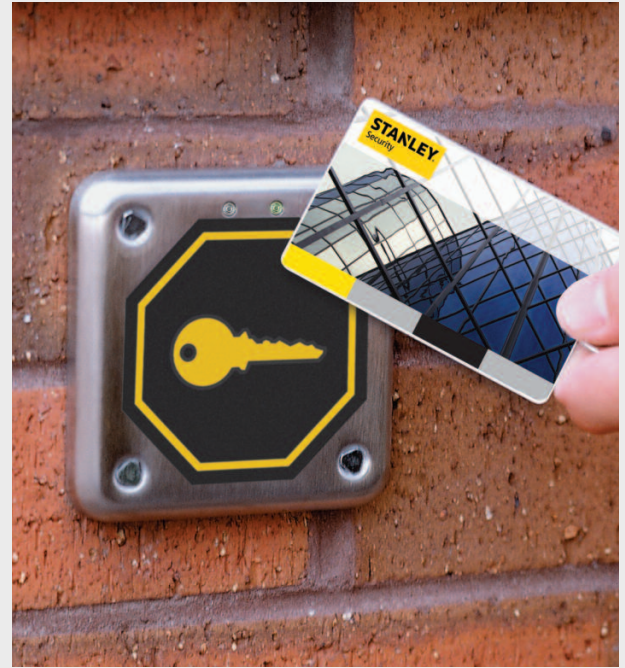

CREDENTIAL READ RANGE

Stanley GS3 Vandal Reader	Up to 4 in.
----------------------------------	-------------

CARD AND KEY FOB COMPATIBILITY



K3010 / D8338



K3011 / D8339



K3011M



HID 1346
ProxKey III




K2010 / D8238



STFOB



K2011 / D8239
/ STCARD



HID1386
ISOProx II Card

